


Simple Network No DNS

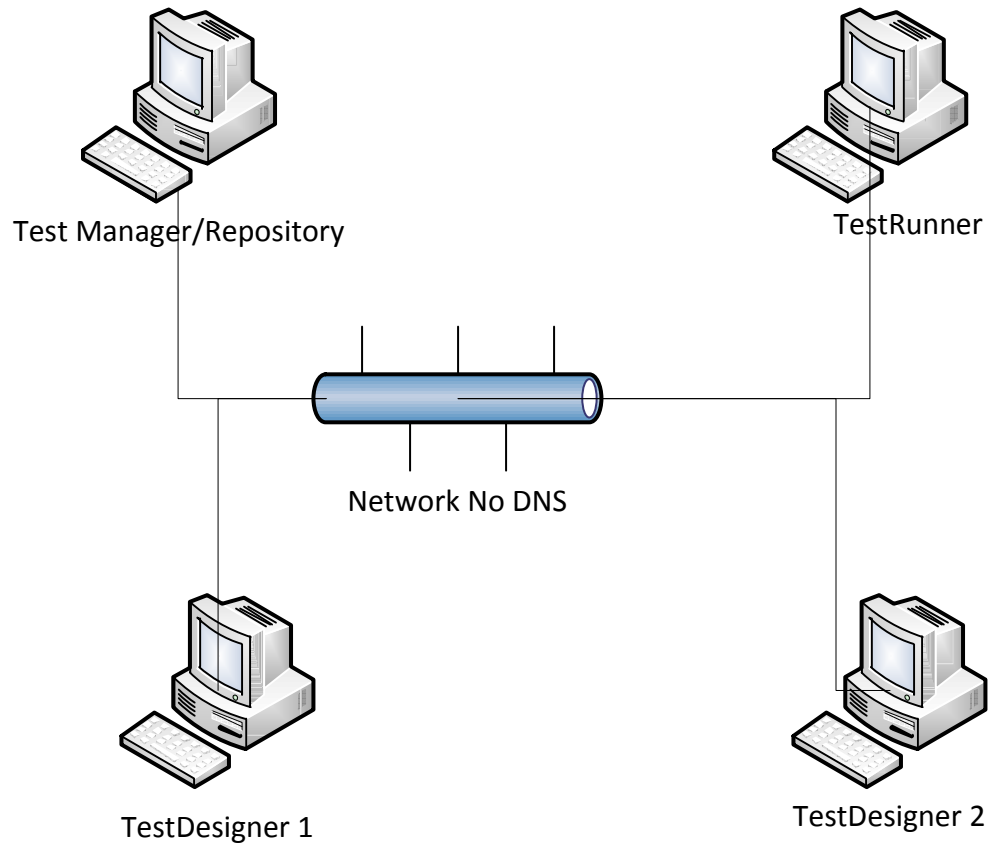

In this Scenario I will set up the computers in the following fashion with Static IP addresses:

1. Test Manager/Repository
 - a. IP address = 192.168.0.1
 - b. Computer Name = TM01
2. TestRunner
 - a. IP address = 192.168.0.2
 - b. Computer Name = TR01
3. TestDesigner 1
 - a. IP address = 192.168.0.3
 - b. Computer Name = TD01
4. TestDesigner 2
 - a. IP address = 192.168.0.4
 - b. Computer Name = TD02

Simple Network No DNS

5. I will create a hosts file that is in the following fashion

192.168.0.1 TM01

192.168.0.2 TR01

192.168.0.3 TD01

192.168.0.4 TD02

6. I will replace the hosts file in Windows\System32\drivers\etc with that hosts file for all 4 machines.
7. I will then install Countdown on each of the machines.